


PF350MB

FILM DATA SHEET



1435 S GROVE AVE #1
 ONTARIO, CA 91761-4590
 (844) 857-8277
www.packfreshusa.com

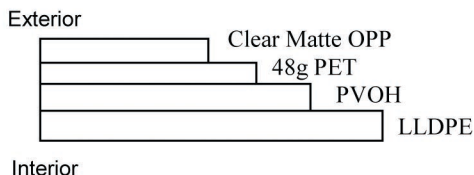

Physical Description:

3.5mil **Clear MATTE** OPP/PET/PVOH/Poly laminated barrier film

Application:

This clear laminated material has excellent oxygen and moisture vapor barrier characteristics. The film's exterior is a matte finish which uniquely positions the product on the store shelf as a natural or organic concept. This film is FDA approved and has good contact clarity. The MB350 is used extensively in food, medical, cosmetic and pharmaceutical industries. Common applications include: meat treats, granola, dried fruit, nuts, herbs, dog treats, cheese, and small medical devices.

Converting:

It can be converted in many ways: 2-seal pouch, 3-seal pouch, side gusset, stand up pouch and tubing. Features include: recloseable zipper, tear notch, round hang hole, and sombrero hang hole. The MB350 can also be surface printed or reverse-trapped printed. It is available in web widths to 60"

Physical Properties:

PROPERTIES	TEST METHOD	UNIT OF MEASURE	TYPICAL VALUE
Caliper		mils	3.5
Yield		sq.in/Lb	12,040
MVTR	Mocon	gms/100 sq. in./24 hrs	0.2
OTR	Mocon	cc/100 sq. in./24 hrs	0.06
Haze		%	7.0
Tensile MD	ASTM D-882	lbs. at break	17
Tensile XMD	ASTM D-882	lbs. at break	19
Elongation MD		%	150
Elongation XMD		%	150

Safeguard Brands, Inc. and PackFreshUSA make no warranty, expressed or implied, as to the suitability of these materials for any specific use. Customers should determine product suitability for their applications based upon their own testing and internal criteria.

*Your Solution
is in the bag*